


LED Emergency Bulkhead



Please see the attached pages for detailed specifications.

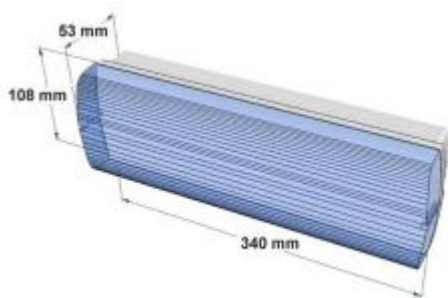

Mounting:	Wall or ceiling mounted
Body material:	Robust Polycarbonate
Colour:	N/A
LED module:	Energy efficient LED system with only 4w power consumption
Colour temperature:	3000k/4000k
Colour Rendering Index (CRI):	CRI 80>
Driver:	Electronic driver in standard – DALI on request
Emergency unit:	Yes
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	-20°c to +45°c
IP Class:	IP65
Power:	220-240V 50/60Hz
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	High-impact clear prismatic Polycarbonate diffuser
General data:	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used