



RIVANO L-TRC

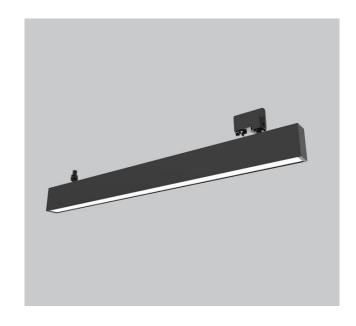

Please see the attached pages for detailed specifications.



Mounting: Track

Body material: Aluminium

Colour: White

LED module: Tridonic

Colour temperature: 3500k

Colour Rendering Index (CRI): CRI 80>

CRI 90> CRI 95>

Driver: Tridonic

Emergency unit: Yes

Movement sensor: Available on request

Daylight control sensor: Available on request

Operating temperature range: 0°c to +40°c

IP Class: IP40

Power: 220-240V 50/60Hz

Lighting direction: Direct

Reflector type: N/A

Light distribution: Symmetric

Diffuser: PMMA

General data: 5 Years standard warranty,

possible extension with project

registration

Different lumen output or wattage available on request All other technical features such as: Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance

+/- 10%.

System power consumption (LED module & driver) depends

on components used

