



PROLINE 45 FLAT

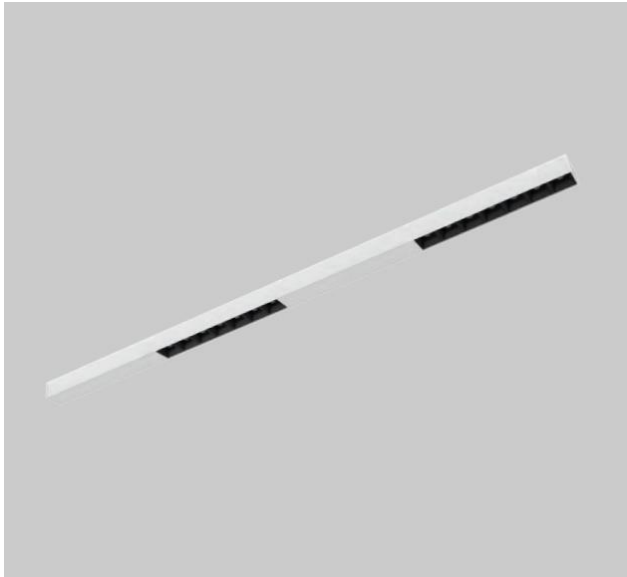

Please see the attached pages for detailed specifications.



| | |
|--------------------------------------|--|
| Mounting: | Surface mounted, suspended, trimless recessed |
| Body material: | Aluminium profile |
| Colour: | Standard white RAL 9003M, other RAL colours on request |
| LED module: | Signify (Philips), Tridonic or equivalent SMD LED modules |
| Colour temperature: | 3000/4000K/2700-6500K TW other on request |
| Colour Rendering Index (CRI): | CRI>80 in standard, other on request |
| Driver: | EVG on-off/DALI/TW DT8/MC (MasterConnect)/Casambi, other on request |
| Emergency unit: | On request |
| Movement sensor: | On request |
| Daylight control sensor: | Built-in XC sensor or wireless MCS sensor |
| Operating temperature range: | 0°C to +35°C |
| IP Class: | IP20 in standard |
| Power: | 220-240V 50/60Hz |
| Lighting direction: | Direct |
| Reflector type: | UGR<19 diffused lenses PREMIUM 1 or PREMIUM2 type |
| Light distribution: | Symmetric/Asymmetric |
| Diffuser: | N/A |
| General data: | 5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used |