

**MARLITE UK**

Marcelo



## MARCELO


Our new Marcelo track spot has been designed to offer maximum versatility when lighting museums and gallery interiors.

By means of a combination of Tridonic Tuneable white LED, a Dali-2 dimming control, and an adjustable 10-40 degree zoom lens system, the Marcelo offers almost limitless flexibility as standard. On board controls allows presets of colours/outputs/angles.

The Marcelo can also be supplied with the additional optical control of barndoors, spreader lens or anti-glare honeycomb diffusers.

<b>Mounting:</b>	Track
<b>Body material:</b>	Die cast aluminium housing
<b>Colour:</b>	White RAL9006, Black RAL9005, Grey RAL9016. Other RAL colours available on request.
<b>LED module:</b>	Tridonic
<b>Colour temperature:</b>	Tuneable range 2700-6500K RGB/RGBW options available
<b>Colour Rendering Index (CRI):</b>	Tridonic SLE COB. CRI90
<b>Driver:</b>	Tridonic Dali-2 Driver
<b>Emergency unit:</b>	On request
<b>Movement sensor:</b>	On request
<b>Daylight control sensor:</b>	On request
<b>Operating temperature range:</b>	0°C to +40°C
<b>IP Class:</b>	IP20
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct
<b>Beam angle:</b>	Adjustable Narrow to Wide Beam
<b>Light distribution:</b>	Symmetric
<b>Diffuser:</b>	Spreader lens or anti-glare honeycomb diffusers

Dimensions & Drawings

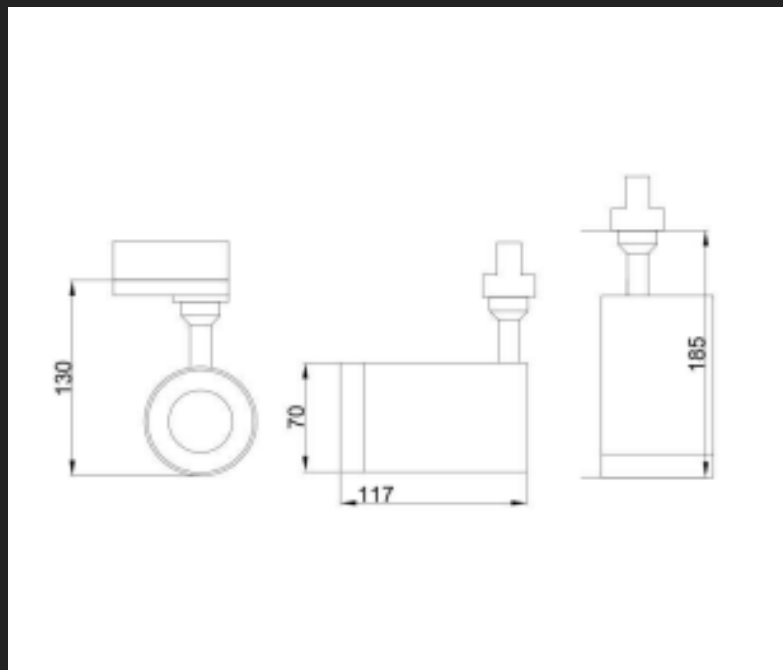

Images

