


## PROFI 60 SLOT

Surface mounted or Suspended LED luminaire with direct or direct / indirect lighting.

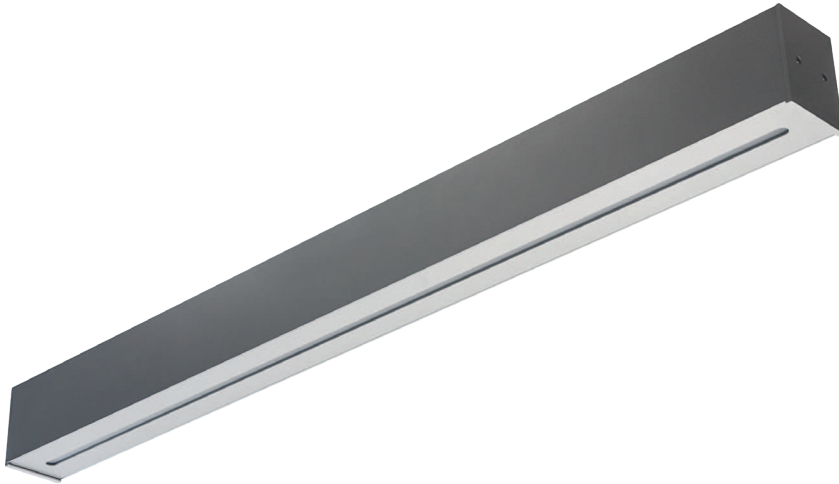


<b>Mounting:</b>	Directly on the ceiling - index nr. 6593.XXXX Suspended - standard 1,5 m long steel suspension wires to be ordered separately - two pieces per single luminaire needed
<b>Body material:</b>	Aluminium profile
<b>Colour:</b>	Standard Gray 9006, other RAL colours on request ( please add RAL code after index number )
<b>LED module:</b>	Philips / Osram or Tridonic LED module included
<b>Colour temperature:</b>	3000K or 4000K
<b>Colour Rendering Index (CRI)</b>	>80 in standard, other on request
<b>Driver:</b>	Electronic driver in standard, DALI on request
<b>Emergency unit:</b>	on request - Standard or DALI 3 hour emergency unit
<b>Movement sensor:</b>	on request
<b>Daylight control sensor:</b>	on request
<b>Operating temperature range:</b>	0°C... +40°C
<b>IP Class:</b>	IP20 in standard, IP44 on request
<b>Power:</b>	220-240V 50/60Hz
<b>Lighting direction:</b>	Direct index nr. 6593.XXXX or Direct / indirect - index nr. 6593.UD.XXXX
<b>Reflector type:</b>	Aluminium white
<b>Light distribution:</b>	Symmetric
<b>Diffuser:</b>	White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

<b>General data:</b>	5 Years standard warranty
	UGR<19 diffuser on request
	Luminaires can be connected into long lighting lines
	Different lumen output or wattage available on request
	All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist
	Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.
	System power consumption (LED module & driver) depends on components used




Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
6593.2200/830	2200	15	3000	Ra > 80	50.000	5	3	587	1,5
6593.2200/840	2200	15	4000	Ra > 80	50.000	5	3	587	1,5
6593.3300/830	3300	23	3000	Ra > 80	50.000	5	3	868	2,00
6593.3300/840	3300	23	4000	Ra > 80	50.000	5	3	868	2,00
6593.4400/830	4400	29	3000	Ra > 80	50.000	5	3	1149	2,5
6593.4400/840	4400	29	4000	Ra > 80	50.000	5	3	1149	2,5
6593.5500/830	5500	36	3000	Ra > 80	50.000	5	3	1430	3,5
6593.5500/840	5500	36	4000	Ra > 80	50.000	5	3	1430	3,5
<b>UP/DN</b>									
6593.UD.6600/830	6600	44	3000	Ra > 80	50.000	5	3	1149	2,5
6593.UD.6600/840	6600	44	4000	Ra > 80	50.000	5	3	1149	2,5
6593.UD.8800/830	8800	58	3000	Ra > 80	50.000	5	3	1430	3,5
6593.UD.8800/840	8800	58	4000	Ra > 80	50.000	5	3	1430	3,5




## PROFI 60 SLOT

Available versions



Accessories



6247.15



6564.15


Index no.                      Steel wire suspension

6247.15	single 1,5 m long suspension set for PROFI luminaire - 2 pcs. Per luminaire needed.
6564.15	1,5 m long transparent power cable with ceiling base and terminal block

[WD] diffuser



[AC] diffuser



[MPR] diffuser

