

EVO LED LINEAR LED SYSTEM




Please see the attached pages for detailed specifications.

| | |
|--------------------------------------|------------------|
| Mounting: | Suspended |
| Body material: | Aluminium |
| Colour: | White/Grey |
| LED module: | Tridonic |
| Colour temperature: | 3000k/4000k |
| Colour Rendering Index (CRI): | CRI 80> |
| Driver: | Tridonic |
| Emergency unit: | Yes |
| Movement sensor: | N/A |
| Daylight control sensor: | N/A |
| Operating temperature range: | 0°C to +40°C |
| IP Class: | IP20 |
| Power: | 220-240V 50/60Hz |
| Lighting direction: | Direct |
| Reflector type: | N/A |
| Light distribution: | Symmetric |
| Diffuser: | Opal diffuser |

General data:

5 Years standard warranty, possible extension with project registration
 Different lumen output or wattage available on request
 All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist
 Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.
 System power consumption (LED module & driver) depends on components used

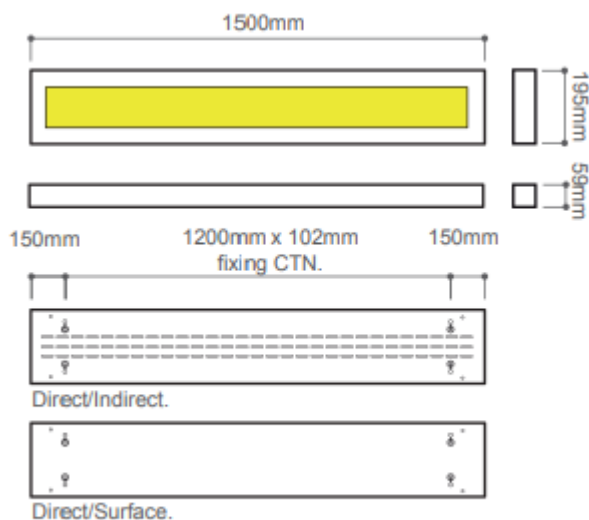

*Housings c/w PIR are normally 60mm longer.