


**EWL KAL-P918-04**



Please see the attached pages for detailed specifications.

<b>Mounting:</b>	Linear
<b>Body material:</b>	N/A
<b>Colour:</b>	White
<b>LED module:</b>	First brand LED module
<b>Colour temperature:</b>	W27 = Warm White (2700K) W30 = Warm White (3000K) W40 = Mid White (4000K) W50 = Cool White (5000K)
<b>Colour Rendering Index (CRI):</b>	CRI 80>
<b>Driver:</b>	First brand driver
<b>Emergency unit:</b>	No
<b>Movement sensor:</b>	Available on request
<b>Daylight control sensor:</b>	Available on request
<b>Operating temperature range:</b>	0°c to +40°c
<b>IP Class:</b>	A = IP20 B = IP40 C = IP65
<b>Power:</b>	N/A
<b>Lighting direction:</b>	Direct
<b>Reflector type:</b>	N/A
<b>Light distribution:</b>	Symmetric
<b>Diffuser:</b>	N/A
<b>General data:</b>	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used

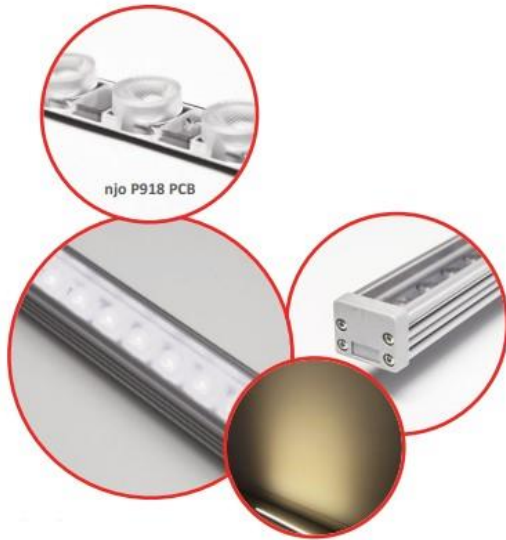