


LIGHTING SOLUTIONS

RIVANO M-TRC

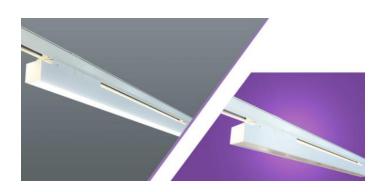

Mounting:	Track
Body material:	Aluminium
Colour:	White
LED module:	Tridonic
Colour temperature:	3500k
Colour Rendering Index (CRI):	CRI 80> CRI 90> CRI 95>
Driver:	Tridonic
Emergency unit:	Yes
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	0°c to +40°c
IP Class:	IP40
Power:	220-240V 50/60Hz
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	PMMA
General data:	5 Years standard warr possible extension wi registration Different lumen outp wattage available on

arranty, with project itput or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used



25 Romer Street, Bolton BL2 6BG Tel: 01204 867727 www.marliteuk.co.uk

Please see the attached pages for detailed specifications.

1800