

MARLITE UK

GSGIM150





GSGIM150

MARLITE UK

Recessed LED luminaires with direct lighting and fully adjustable die cast body. Multiple options available for customisation.

Mounting:	Recessed
Body material:	Fully adjustable die cast body
Colour:	Standard White RAL9016, other RAL colours on request
LED module:	Premium White Ra90 LED module as standard
Colour temperature:	3000/4000K, other on request
Colour Rendering Index (CRI):	>80 in standard, other on request
Driver:	Philips LED and driver system
Emergency unit:	On request
Movement sensor:	On request
Daylight control sensor:	On request
Operating temperature range:	0°C to +40°C
IP Class:	IP40
Power:	220-240V 50/60Hz
Lighting direction:	Direct
Reflector type:	24° reflector as standard with 12° and 40° options
Light distribution:	Symmetric
Diffuser:	N/A

Dimensions & Drawings

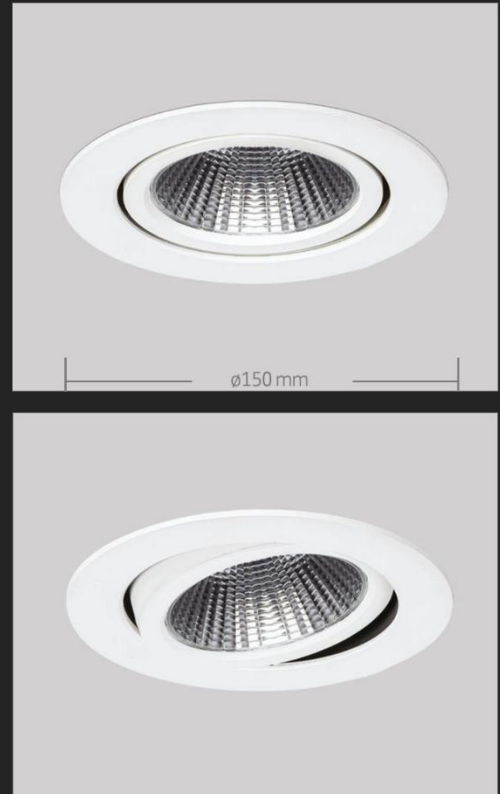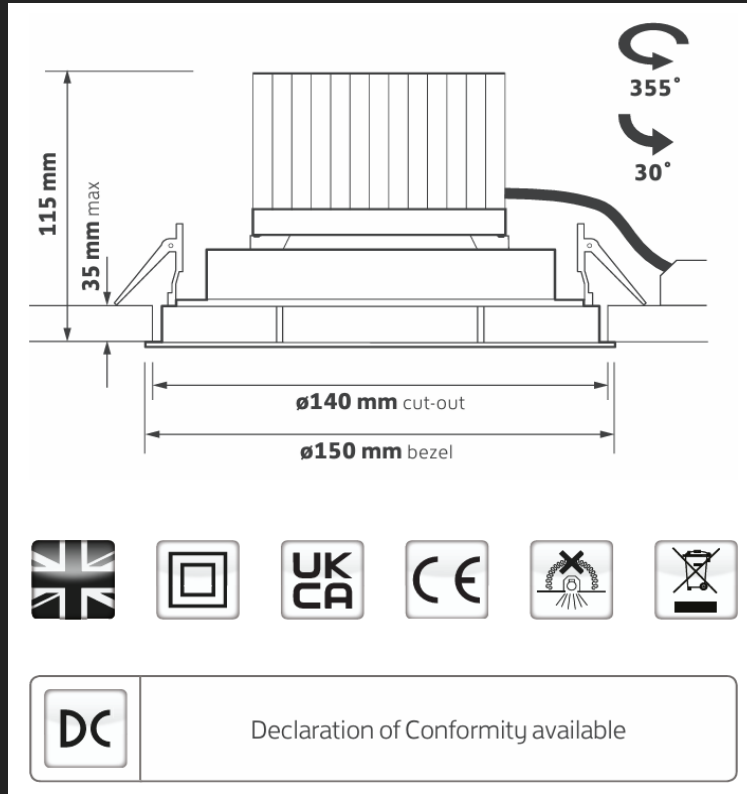

Key Features

- MINI high output, low glare LED gimbal
- Fully adjustable die cast body
- Philips LED and driver system
- Premium White Ra90 LED module as standard
- 24° reflector as standard with 12° and 40° options
- No visible flicker (IEEE 1789 - 2015)
- ETL and Part L compliant variants
- Life >50,000h L70/B10
- 5 year warranty

GSGIM150

Options



/NB
12° Multi- faceted reflector



/WB
40° Multi- faceted reflector



Contact Sales
Black body



/T+DALI
Touch dimming / DALI



/BTC
Casambi Bluetooth wireless network (inc dim)



/EM
3h EM conversion
c/w remote indicator



/EMD
3h DALI / ST EM conversion
c/w remote indicator

12° multi- faceted reflector	/NB
40° multi- faceted reflector	/WB
Touch dimming / DALI	/T+DALI
Casambi wireless network (inc dim)	/BTC
Emergency (remote indicator)	/EM
DALI Emergency (remote indicator)	/EMD