



**DB 300 LED**

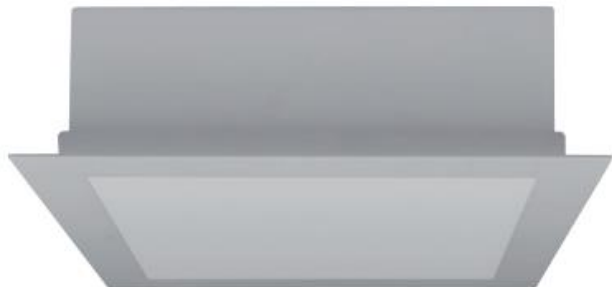

Please see the attached pages for detailed specifications.



|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mounting:</b>                     | Recessed                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Body material:</b>                | Steel & Aluminium                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Colour:</b>                       | White RAL9016                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>LED module:</b>                   | First brand LED module                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Colour temperature:</b>           | 3000k/4000k                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Colour Rendering Index (CRI):</b> | CRI 80>                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Driver:</b>                       | First brand driver                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Emergency unit:</b>               | No                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Movement sensor:</b>              | Available on request                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Daylight control sensor:</b>      | Available on request                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Operating temperature range:</b>  | 0°C to +40°C                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>IP Class:</b>                     | IP44                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Power:</b>                        | 220-240V 50/60Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Lighting direction:</b>           | Direct                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Reflector type:</b>               | Aluminium glossy                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Light distribution:</b>           | Symmetric                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Diffuser:</b>                     | Altuglas [ ALT ] opalic diffuser in standard                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>General data:</b>                 | 5 Years standard warranty, possible extension with project registration<br>Different lumen output or wattage available on request<br>All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist<br>Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.<br>System power consumption (LED module & driver) depends on components used |