


35 Series



Please see the attached pages for detailed specifications.

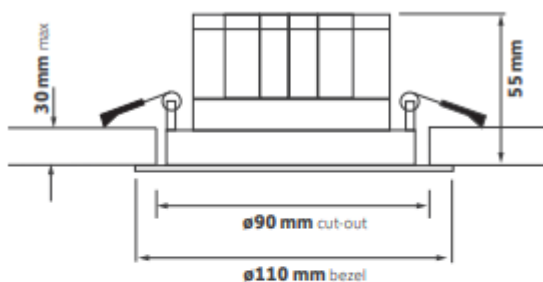

Mounting:	Recessed
Body material:	Die Cast
Colour:	White RAL9016
LED module:	Tridonic
Colour temperature:	3000, 4000, 5500
Colour Rendering Index (CRI):	CRI 80>
Driver:	Tridonic
Emergency unit:	Yes
Movement sensor:	N/A
Daylight control sensor:	N/A
Operating temperature range:	Up to 40°C
IP Class:	IP20
Power:	9w
Lighting direction:	Direct
Reflector type:	Low glare specular reflector
Light distribution:	Symmetric
Diffuser:	Low Glare Specular Reflector
General data:	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED efficacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used