## MARLITE UK


LIGHTING SOLUTIONS

## **Exit Mex Suspended**



Mounting:	Suspended
Body material:	Polycarbonate
Colour:	White
LED module:	First brand LED module
Colour temperature:	4500k
Colour Rendering Index (CRI):	CRI 80>
Driver:	First brand driver
Emergency unit:	Yes
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	0°c to +40°c
IP Class:	IP40
Power:	N/A
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	N/A
General data:	5 Years standard warrant possible extension with p registration

Please see the attached pages for detailed specifications.

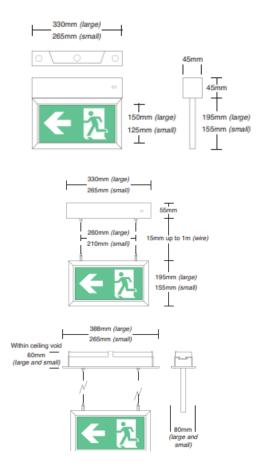



25 Romer Street, Bolton BL2 6BG Tel: 01204 867727 www.marliteuk.co.uk 5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends

(LED module & driver) depends on components used