


Juliet S Mi



Please see the attached pages for detailed specifications.

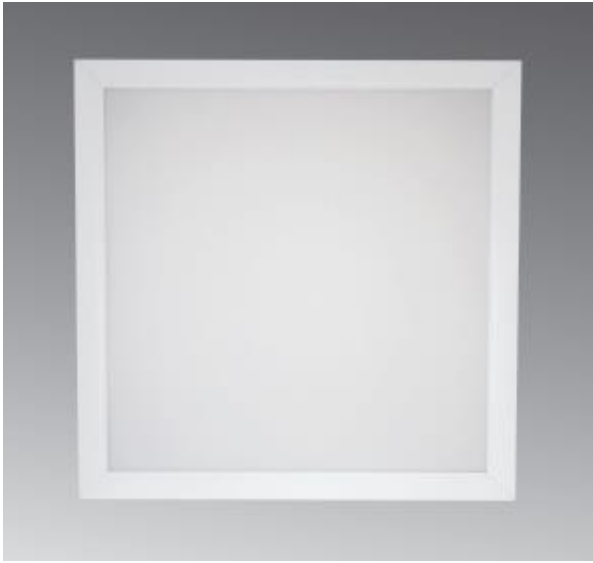

Mounting:	Recessed
Body material:	Metal/Aluminium
Colour:	Various RAL colours available
LED module:	Tridonic
Colour temperature:	2700k – 6500k
Colour Rendering Index (CRI):	CRI > 80
Driver:	Tridonic
Emergency unit:	No
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	0°C to +40°C
IP Class:	IP44/IP65
Power:	N/A
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	PMMA
General data:	<p>5 Years standard warranty, possible extension with project registration</p> <p>Different lumen output or wattage available on request</p> <p>All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist</p> <p>Wattage of products may vary due to constant LED efficacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.</p> <p>System power consumption (LED module & driver) depends on components used</p>