



**HEXA 3**

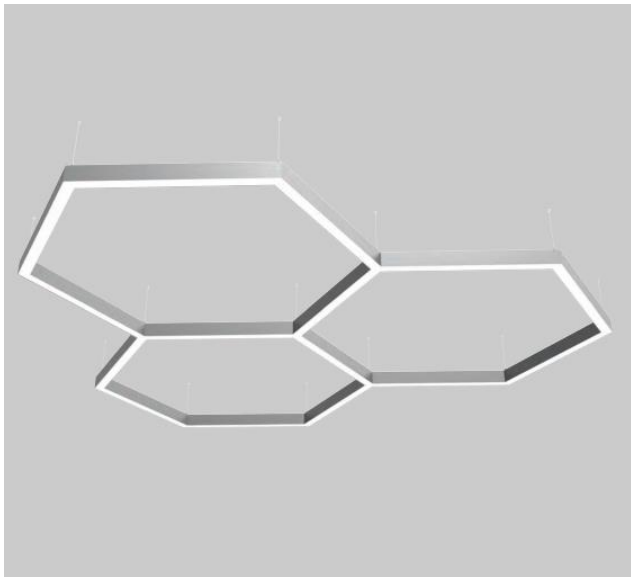

Please see the attached pages for detailed specifications.



|                                      |  |
|--------------------------------------|--|
| <b>Mounting:</b>                     | Surface mounted or suspended   |
| <b>Body material:</b>                | Aluminium profile  |
| <b>Colour:</b>                       | Standard white RAL 9003M, other RAL colours on request   |
| <b>LED module:</b>                   | Signify (Philips), Tridonic or equivalent SMD LED modules  |
| <b>Colour temperature:</b>           | 3000/4000K/2700-6500K TW other on request  |
| <b>Colour Rendering Index (CRI):</b> | CRI>80 in standard, other on request   |
| <b>Driver:</b>                       | EVG on-off/DALI/TW DT8/MC ( MasterConnect )/Casambi, other on request  |
| <b>Emergency unit:</b>               | On request   |
| <b>Movement sensor:</b>              | On request   |
| <b>Daylight control sensor:</b>      | Built-in XC sensor or wireless MCS sensor  |
| <b>Operating temperature range:</b>  | 0°C to +35°C   |
| <b>IP Class:</b>                     | IP20 in standard   |
| <b>Power:</b>                        | 220-240V 50/60Hz   |
| <b>Lighting direction:</b>           | Direct/indirect lighting   |
| <b>Reflector type:</b>               | White reflector  |
| <b>Light distribution:</b>           | Symmetric  |
| <b>Diffuser:</b>                     | OP opal acrylic / MP19H microprismatic UGR<19  |
| <b>General data:</b>                 | 5 Years standard warranty, possible extension with project registration<br>Different lumen output or wattage available on request<br>All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist<br>Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.<br>System power consumption (LED module & driver) depends on components used |