


Juliet 592 590



Please see the attached pages for detailed specifications.

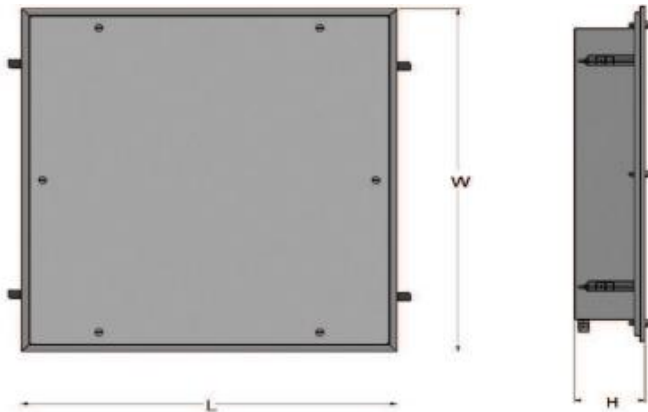

Mounting:	Recessed
Body material:	Metal
Colour:	Various RAL colours available
LED module:	Tridonic
Colour temperature:	2700 K - 6500 K
Colour Rendering Index (CRI):	CRI > 85
Driver:	Tridonic
Emergency unit:	No
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	(-) 25 ° C / (+) 50 ° C operating ambient temperature range.
IP Class:	IP65
Power:	N/A
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	PMMA
General data:	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used