


## LAB LED



Please see the attached pages for detailed specifications.

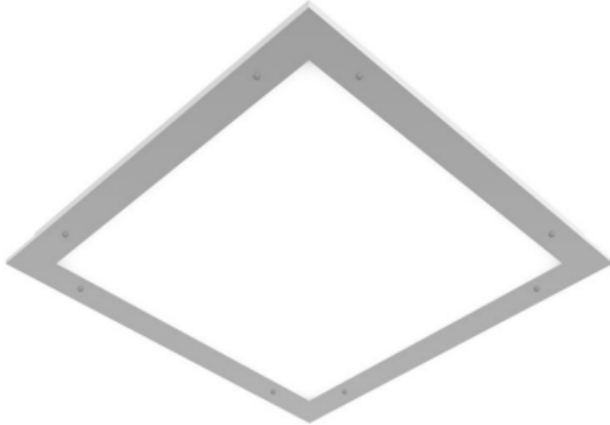

<b>Mounting:</b>	Recessed
<b>Body material:</b>	Steel
<b>Colour:</b>	White
<b>LED module:</b>	Tridonic
<b>Colour temperature:</b>	3000k/4000k/5000k
<b>Colour Rendering Index (CRI):</b>	CRI >80
<b>Driver:</b>	Tridonic
<b>Emergency unit:</b>	Yes
<b>Movement sensor:</b>	Available on request
<b>Daylight control sensor:</b>	Available on request
<b>Operating temperature range:</b>	0°C to +40°C
<b>IP Class:</b>	IP66
<b>Power:</b>	N/A
<b>Lighting direction:</b>	Direct
<b>Reflector type:</b>	N/A
<b>Light distribution:</b>	Symmetric
<b>Diffuser:</b>	PMMA
<b>General data:</b>	<p>5 Years standard warranty, possible extension with project registration</p> <p>Different lumen output or wattage available on request</p> <p>All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist</p> <p>Wattage of products may vary due to constant LED efficacy improvements. Luminous lux &amp; Luminaire Power tolerance +/- 10%.</p> <p>System power consumption (LED module &amp; driver) depends on components used</p>